

RTest Package - get started

Sebastian Wolf

16 Apr 2018

About


The RTest package shall allow you to write human readable test cases. If you wonder why to build human readable tests, you can read this [blog entry](#).

Our package RTest is basically a wrapper around testthat functions. Instead of comparing two values by a function call, we will show you how to compare two values by an XML file. As a general principle, you can say, that you define the test case inside an XML file + a test-adapter R script. The test-adapter contains the “How to?” test, meaning the function call and what to take out of the XML file. You do not necessarily have to provide a test-adapter. RTest also provides you with a “generic” test adapter that will check the values inside your XML file and see what you want to test.

The XML file contains the parameters and reference values and the function you want to call. The function name can be the package function name or the test-adapter method name. All three combined make the call

```
reference %>% compare_to( function_call ( parameters ) )
```

The `compare_to` part is what RTest provides you with. The XML is handed over to the RTest package, that calls testthat and produces a nice report. Please see the figure below for the general principle.

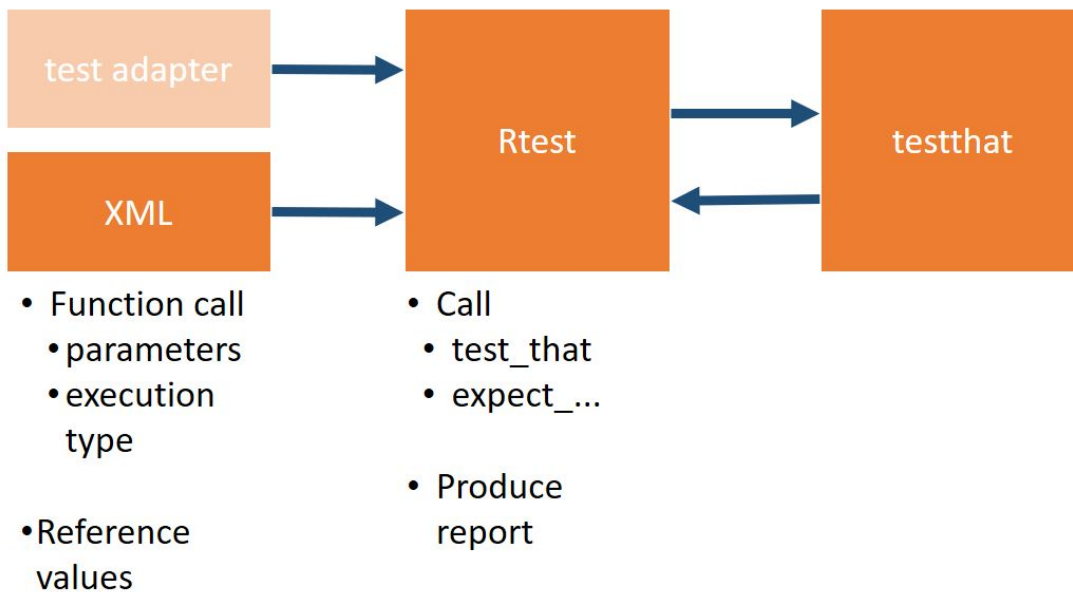

Simplistic Test Case

This is a step by step guide how to build a test case. The final test case can be found under: RTest_TC-generic.xml

Functions to test

To show you how you can test some simple functions, a test collection was prepared as an example. We want to test 5 functions:

- 1) `example_data_frame` - Adding up rowwise and multiplying the values by a parameter called `mult`.
- 2) `example_image` - Returning the Roche Logo as a PNG by returning a path
- 3) `example_list` - Creates a list with one element called by the `name_1` input parameter with the value "VALUE1", an element called "NAME2" with the value of the `value_2` parameter and an element called "data.frame" with a two column data.frame
- 4) `example_vector` - Returns a vector containing the word "RTest" `rep` times
- 5) `example_value` - Returns $(x-y)/(x)$

These functions are set up within the RTest package and you can directly call them from within the package.

Test Case basics - XML

First an empty test case in RTest contains a synopsis and input-data:

```
<?xml version="1.0" encoding="UTF-8"?>
<RTestCase

xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"

xsi:noNamespaceSchemaLocation="../xsd/RTest.xsd">
  <ID>RTest_TC-01</ID>
  <synopsis>
    <version>01</version>
    <author>Matthias Pfeifer</author>
    <short-description>RTest Template TC</short-description>
    <description>
      <![CDATA[
        Extended Description of the test case allowing also <some><special>/characters
      ]]>
    </description>
    <creation-date>2016-01-25</creation-date>
    <change-history>
      <change author="Matthias Pfeifer" date="2016-01-25">Initial Version</change>
    </change-history>
  </synopsis>
  <input-data>
    <data.frame name="test01">
      <col-defs>
        <coldef name="x" type="numeric" />
        <coldef name="y" type="numeric" />
      </col-defs>
      <row>
        <cell>1</cell>
```

```

        <cell>2</cell>
    </row>
    <row>
        <cell>1</cell>
        <cell>2</cell>
    </row>
</data.frame>
</input-data>
<tests>
    ...
</tests>
</RTestCase>

```

As you can see, the XML file that we'll create links to the RTest.xsd. This allows to pre-write certain parts of the document and define structures, like "What does a data.frame look like?". To visualize XML and XSD we highly recommend using Altova XML Spy. The input data output we created here can be generated using:

```

my_data <- data.frame(x=c(1,2),y=c(1,2))

RTest::xmlWriteData_data.frame("data.frame",my_data,"test01")

```

```

## <data.frame name="test01">
##   <col-defs>
##     <coldef name="x" type="numeric" />
##     <coldef name="y" type="numeric" />
##   </col-defs>
##   <row name="1">
##     <cell>1</cell>
##     <cell>1</cell>
##   </row>
##   <row name="2">
##     <cell>2</cell>
##     <cell>2</cell>
##   </row>
## </data.frame>

```

Test Case function calls - XML

example_data_frame

To test the `example_data_frame` we want to use the `input-data` part `test01` as an input. Therefore we define the test case as:

```

<example_data_frame test-desc="Test data.frame">
  <params>
    <RTestData_input_data param="data" name="test01" />
    <mult value="1" type="numeric" />
  </params>
  ...
</example_data_frame>

```

You can see that the `RTestData_input_data` grabs the `test01` element from `input-data` and hands it over to the `data` argument of `example_data_frame`. Additionally we create a parameter called `mult` with value 1.

Now we want to define a reference data.frame inside the XML and tell that the function shall be executed silently:

```

<example_data_frame test-desc="Test data.frame">
  <params>
    <RTestData_input_data param="data" name="test01" />
    <mult value="1" type="numeric" />
  </params>
  <reference>
    <col-defs>
      <coldef name="x" type="numeric" />
      <coldef name="y" type="numeric" />
      <coldef name="sum" type="numeric" />
    </col-defs>
    <row>
      <cell>1</cell>
      <cell>2</cell>
      <cell>3</cell>
    </row>
    <row>
      <cell>1</cell>
      <cell>2</cell>
      <cell>3</cell>
    </row>
  </reference>
  <testspec>
    <execution execution-type="silent" />
    <return-value compare-type="equal" diff-type="absolute"
      tolerance="0.001" />
  </testspec>
</example_data_frame>

```

It shall be clear, that the **reference** tag marks what the function call shall be compared against. The **testspec** tag shows

- 1) in **execution** how the execution of **example_data_frame** shall take place (silent, message, warning, error)
- 2) How the return value shall be compared, here with a tolerance of 1E-3.

You can check all other definitions of the **testspec** inside the **RTest.xsd** file that can be found in `file.path(find.package("RTest"), "xsd/RTest.xsd")`

Other functions

We will continue writing the function calls inside the XML after the same principle. You can check out the whole test in **RTest_TC-generic.xml**

Test execution

To execute the test cases you just need to call the **RTest** included function **RTest.execute**. It let's you choose where your test cases are located and what shall be the name of the output file. If we now want to perform this task for our described 5 Test cases we need to run:

```

library(magrittr)
library(RTest)
RTest::RTest.execute(
  testcase.directory = list.dirs(find.package('RTest'), recursive=TRUE) %>%

```

```

    grep(pattern="xml-templates",value=TRUE),
    open=FALSE,
    f.pattern = "RTest_TC-generic.xml"
)

## 1 files found in input directory:
## [1] "RTest_TC-generic.xml"
##
## Import TC file '/tmp/Rtmp6mHVjG/Rinst65063da70b52/RTest/xml-templates/RTest_TC-generic.xml'
##
## Create new TC using adapter definition 'RTestCase'.Test Case
##   Object of class ' RTestCase '
##   @ID : RTest_TC-generic
##   @tc.type : RTestCase
##   @synopsis :
##     $version : 01
##     $author : Sebastian Wolf
##     $short-description : RTest Template TC for generic test-adapter
##     $description : A test case without a test adapter
##     $label :
##     $creation-date : 2018-12-11
##     $change-history :
##       2018-12-11 , Sebastian Wolf :
##       Initial Version
##
##   @xml.fPath : /tmp/Rtmp6mHVjG/Rinst65063da70b52/RTest/xml-templates/RTest_TC-generic.xml
##   @xml.root : XMLNode
##
##   @input.data :
## test01 : 'data.frame': 2 obs. of 2 variables:
##   $ x: num 1 1
##   $ y: num 2 2
##
##   @test.for : NA
##   @test.result : NA
##
##   @tests :
## RTest : List of 5
##   $ :List of 1
##     ..$ example_data_frame:List of 1
##       .. ..$ :List of 16
##         .. .. ..$ pkg : chr "RTest"
##         .. .. ..$ pgk-iter : num 1
##         .. .. ..$ func : chr "example_data_frame"
##         .. .. ..$ func-iter : num 1
##         .. .. ..$ test-code : chr "RTest::example_data_frame"
##         .. .. ..$ test-adapter: chr "RTestCase"
##         .. .. ..$ test-func : chr "test.RTest.example_data_frame"
##         .. .. ..$ pkg-desc : chr ""
##         .. .. ..$ func-desc : chr "Test data.frame"
##         .. .. ..$ xpath : chr "//RTestCase/tests/RTest[1]/example_data_frame[1]"
##         .. .. ..$ reporter : logi NA
##         .. .. ..$ result : logi NA
##         .. .. ..$ cache : logi NA

```

```

## .. .. .$ execresid : logi NA
## .. .. .$ specid : chr "01"
## .. .. .$ riskid : chr "01"
## $ :List of 1
## ..$ example_image:List of 1
## .. .. .$ :List of 16
## .. .. .$ pkg : chr "RTest"
## .. .. .$ pgk-iter : num 2
## .. .. .$ func : chr "example_image"
## .. .. .$ func-iter : num 1
## .. .. .$ test-code : chr "RTest::example_image"
## .. .. .$ test-adapter: chr "RTestCase"
## .. .. .$ test-func : chr "test.RTest.example_image"
## .. .. .$ pkg-desc : chr ""
## .. .. .$ func-desc : chr "Compare an image"
## .. .. .$ xpath : chr "//RTestCase/tests/RTest[2]/example_image[1]"
## .. .. .$ reporter : logi NA
## .. .. .$ result : logi NA
## .. .. .$ cache : logi NA
## .. .. .$ execresid : logi NA
## .. .. .$ specid : chr "02"
## .. .. .$ riskid : chr "01"
## $ :List of 1
## ..$ example_list:List of 1
## .. .. .$ :List of 16
## .. .. .$ pkg : chr "RTest"
## .. .. .$ pgk-iter : num 3
## .. .. .$ func : chr "example_list"
## .. .. .$ func-iter : num 1
## .. .. .$ test-code : chr "RTest::example_list"
## .. .. .$ test-adapter: chr "RTestCase"
## .. .. .$ test-func : chr "test.RTest.example_list"
## .. .. .$ pkg-desc : chr ""
## .. .. .$ func-desc : chr ""
## .. .. .$ xpath : chr "//RTestCase/tests/RTest[3]/example_list[1]"
## .. .. .$ reporter : logi NA
## .. .. .$ result : logi NA
## .. .. .$ cache : logi NA
## .. .. .$ execresid : logi NA
## .. .. .$ specid : chr "03"
## .. .. .$ riskid : chr "01"
## $ :List of 1
## ..$ example_vector:List of 1
## .. .. .$ :List of 16
## .. .. .$ pkg : chr "RTest"
## .. .. .$ pgk-iter : num 4
## .. .. .$ func : chr "example_vector"
## .. .. .$ func-iter : num 1
## .. .. .$ test-code : chr "RTest::example_vector"
## .. .. .$ test-adapter: chr "RTestCase"
## .. .. .$ test-func : chr "test.RTest.example_vector"
## .. .. .$ pkg-desc : chr ""
## .. .. .$ func-desc : chr "Test vector example"
## .. .. .$ xpath : chr "//RTestCase/tests/RTest[4]/example_vector[1]"

```

```

## .. .. .$ reporter      : logi NA
## .. .. .$ result        : logi NA
## .. .. .$ cache         : logi NA
## .. .. .$ execresid     : logi NA
## .. .. .$ specid        : chr "04"
## .. .. .$ riskid        : chr "01"
## $ :List of 1
## ..$ example_variable:List of 1
## .. .. .$ :List of 16
## .. .. .$ pkg           : chr "RTest"
## .. .. .$ pgk-iter      : num 5
## .. .. .$ func          : chr "example_variable"
## .. .. .$ func-iter     : num 1
## .. .. .$ test-code     : chr "RTest::example_variable"
## .. .. .$ test-adapter  : chr "RTestCase"
## .. .. .$ test-func     : chr "test.RTest.example_variable"
## .. .. .$ pkg-desc      : chr ""
## .. .. .$ func-desc     : chr "Test relative difference"
## .. .. .$ xpath         : chr "//RTestCase/tests/RTest[5]/example_variable[1]"
## .. .. .$ reporter      : logi NA
## .. .. .$ result        : logi NA
## .. .. .$ cache         : logi NA
## .. .. .$ execresid     : logi NA
## .. .. .$ specid        : chr "05"
## .. .. .$ riskid        : chr "01"
##
##
## Execute following test cases:
## [1] "RTest_TC-generic"
##
## ##### TEST CASE 'RTest_TC-generic'
##
## Test for: 'RTest', 'RTest', 'RTest', 'RTest', 'RTest'
##
## Run test(s) for 'RTest'
## Test 'RTest::example_data_frame' ... data.frame: 2 x 3 ... success
## Test 'RTest::example_image' ... success
## Test 'RTest::example_list' ... data.frame: 2 x 2 ... success
## Test 'RTest::example_vector' ... success
## Test 'RTest::example_variable' ... success
##
## Write HTML summary for following test cases:
## [1] "RTest_TC-generic"
##
## Write details for 'RTest::example_data_frame'
## Execute function silently. (example_data_frame)
## 0%
## Checking output class and reference class. Check return value (variable).
## 0%
## Check return value (data.frame).
## 0%
## Write details for 'RTest::example_image'
## Execute function silently. (example_image)
## 0%


```

```
## Check return image.
## 0%
## Write details for 'RTest::example_list'
## Execute function silently. (example_list)
## 0%
## Checking output class and reference class. Check return value (variable).
## 0%
## Check return value (list).
## 0%
## -- List entry 'myname' (variable): Check return value (variable).
## 0%
## -- List entry 'NAME2' (variable): Check return value (variable).
## 0%
## -- List entry 'data.frame' (data.frame): Check return value (data.frame).
## 0%
## Write details for 'RTest::example_vector'
## Execute function silently. (example_vector)
## 0%
## Checking output class and reference class. Check return value (variable).
## 0%
## Check return value (variable).
## 0%
## Write details for 'RTest::example_variable'
## Execute function silently. (example_variable)
## 0%
## Checking output class and reference class. Check return value (variable).
## 0%
## Check return value (variable).
## 0%
##
## HTML summary written to file '/tmp/RtmpiBRjID/file65406da8a858.html'.
```

And you are done and will get a nice output.

12 Test

RTest Vignette



<p>Project: RTest Vignette</p> <p>Project Details: Example test execution</p> <p>Tester: Example tester</p> <p>Test Start: 2018-12-11 09:44:41</p> <p>Report Generated: 2018-12-11 09:44:43</p> <p>No. of Test Cases: 1</p>	<p>Host: Windows 10 x64</p> <p>Host Version: build 15063</p> <p>Host Name (User): RP2M0948885 (root25)</p> <p>R: R version 3.4.2 (2017-09-26)</p> <p>R Architecture: i386_64</p>
---	---

GLOBAL TEST STATUS

TEST PASSED

0 TCs failed (0%)
1 TCs passed (100%)

EXECUTION SUMMARY

TC	Version	Type	Label	Description	No. of Testgroups	Result	Status
RTest_TC-generic	01	RTestCase		RTest Template TC for generic test-adapter	1	RTest_TC-generic.xml	SUCCESS
Package	#	Description	Function	SpecID	RiskID	#	Description
RTest	1		example_data_image			1	Test data frame
RTest	2		example_image			1	Compare an image
RTest	3		example_list			1	
RTest	4		example_vector			1	Test vector example
RTest	5		example_variable			1	Test relative difference

EXECUTION DETAILS

RTest_TC-generic

<p>Version: 01</p> <p>Type: RTestCase</p> <p>Short Description: RTest Template TC for generic test-adapter</p> <p>Description: A test case without a test adapter</p> <p>Input File: C:\users\25\FP\RPfig_RTestMain\RTest\test\templates\RTest_TC-generic.xml</p>	<p>Author(s): Sebastian Voth</p> <p>Creation Date: 2018-01-25</p>
--	---

DONE!

Using RTest for other packages

To use RTest for other packages you need to write your own `xsd` file and your own `.xml` test cases. For the `xsd` please use the `RTest.xsd` as a schema you can build on.